









KEY FEATURES APPLICATIONS



EDGE Orbital Scrubhead delivers premium chemical-free floor stripping while reducing water consumption by up to 70%.





High Performance motors and down pressure provides an unmatched standard of cleaning.



Tons of Applications simply by changing pad types or adding extra weights if possible.



Reduce Slip & Fall potential by eliminating chemical stripper from your facilities cleaning supplies.



Heavy Duty Isolators delivers ideal vibration reduction to the operators hands for optimal operator ergonomics.




- School Systems
- Sports Arenas
- Retail
- Food & Beverage
- Healthcare
- Grocery Stores
- Automotive
- Airports



MULTIPLE FLOOR APPLICATIONS




VIEW INSIDE

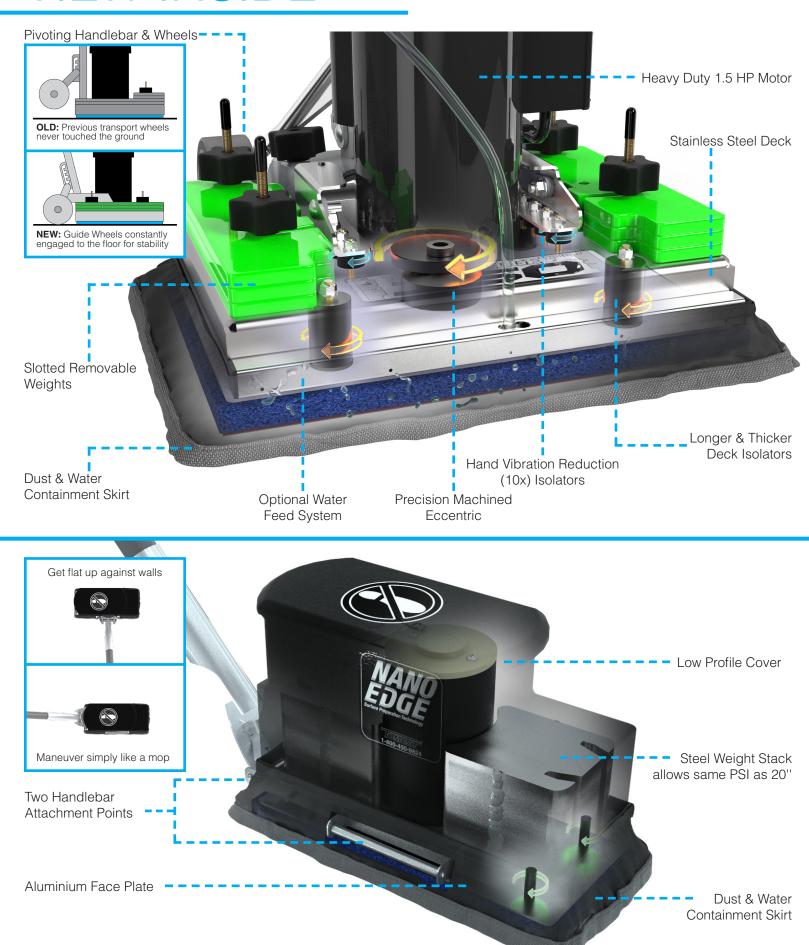

ROUND VS. SQUARE


EDGE's rectangular shape offers equal dwell time across pad width, unlike round pads. The square corner allows EDGE to clean into corners and against baseboards where round pads simply can't.

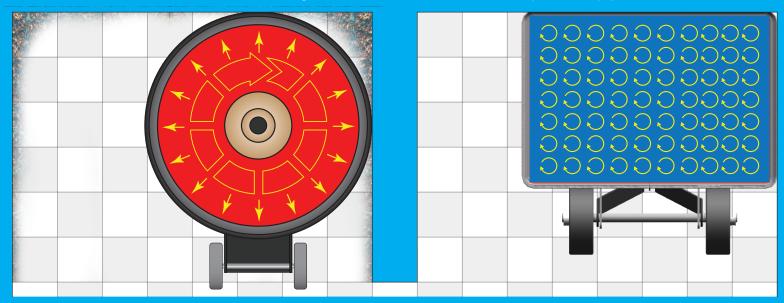


RESURFACE SIMPLY

Finished floors get dirty quickly, however it's not the floor tiles that are getting dirty, but dirt and scratches in the top layers of the finish that make the floor appear dirty.

Resurfacing with EDGE removes the dirt and scratches out of the top finish layers and enables a new layer of finish to be laid down on top. Save money by not using as many chemicals. Save time by not removing all old finish layers that are still clean. Easy for new operators compared to training with chemical stripper.

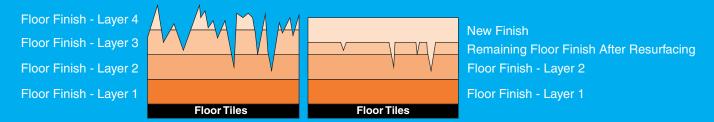

MAINTAIN HEALTH & SAFETY

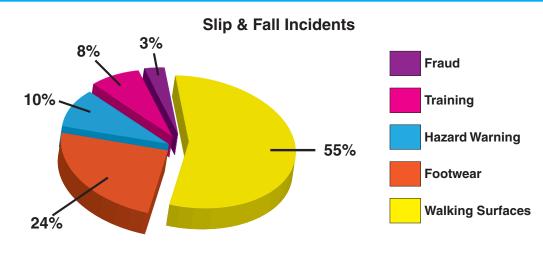

Employees health and safety directly relates to any organization's bottom line.

Who wouldn't want to effectively reduce Slip & Fall incidents in relation to Chemical Stripper?


By switching to the EDGE resurfacing program, you remove Chemical Stripper out of the equation!

COMMON OPTIONS - EDGE ISO

Onboard Solution Tank (WET)

Equip Your EDGE ISO With Water - or - Vacuum!

HEPA Onboard Vac (DRY)




Yellow colors are for demonstraction purposes only.

Easily dispense solution wherever you need it with this simple solution tank.





Make job clean-up simple and quicker with the Onboard Vacuum attachment option.

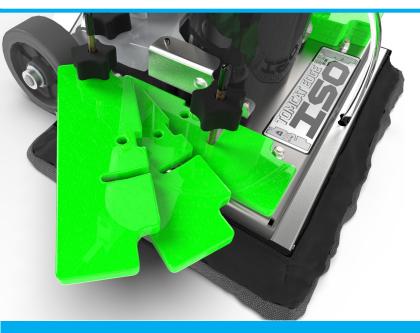

EXTRA SLOTTED WEIGHTS

Changing from application to application is made simple with slotted weights allowing for quick and easy removal or addition of weights to the scrub deck.

Min. Weight: 108 lbs (50.0 kg)
Base Weight: 144 lbs (63.3 kg)
Max Weight: 232 lbs (105.2 kg)

Great for:

- Extreme VCT Finish Build-up
- Hardwood Floor Sanding
- Stone Polishing

COMMON OPTIONS - NANO

CARRY HANDLE STRAP



Stainless steel plates with a heavy duty nylon strap to aid in transport

BASEBOARD CART



Clean baseboards simply and effectively

HANDLE TRIGGER



Use the Handle Trigger and easily hold down the trigger

CALL FOR A DEMONSTRATION



800-450-9824 **(+001)-262-681-6470**

BODY CONSTRUCTION / DIMENSIONS

Certifications:

Since 1986, our family owned company has been designing, building and supporting the best in floor maintenance equipment. Our *Tomcat* brand services the world with unsurpassed commercial cleaning equipment, continually exceeding expectations and setting the industry bar that much higher.

We've built our reputation by providing the highest value machines and providing local support via 425 distributors in **www.tomcatequip.com** over 42 different countries.

FDGF ISO 20"

AUTHORIZED DISTRIBUTOR

NANO EDGE 10"

BODY CONSTRUCTION / DIMENSIONS	EDGE 130 20	NANO EDGE 10
Chassis Construction:	10 Gauge Steel (2.6 mm)	10 Gauge Steel (2.6 mm)
Scrub Head Size (L \times W \times H):	20" × 14" × 2.75" (50.8 × 35.6 × 7 cm)	$9.75" \times 4" \times 6.25"$ (24.8 × 10.2 × 15.9 cm)
Scrub Head Construction:	7 Gauge Stainless Steel (4.8 mm)	10 Gauge Steel (2.6 mm)
Handlebar Size (L x Diameter Ø):	37.25" × 1.5" Ø (94.6 × 3.8 cm Ø)	51.25" × 1" Ø (130.2 × 2.5 cm Ø)
Handlebar Grips:	Padded	Padded
Wheels:	6" x 2" Non-Marking Wheels	N/A
Total Assembled Weight:	144 lbs (65.3 kg)	22 lbs (10 kg)
Optional Weight Capacity Max:	232 lbs (105.2 kg)	N/A
BRUSH / PAD SYSTEM		
Dimensions:	20" × 14" (50.8 x 35.6 cm)	10.5" × 5.25" (26.7 x 13.3 cm)
Lower Deck Isolators:	4 (1.5" Ø × 2.25" Height)	4 (0.5" Ø × 1.0" Height)
Upper Deck Isolators:	10 (1.0" Ø × 0.5" Height)	N / A
Motor Power:	1.5 HP (1,119 watts)	0.33 HP (246 watts)
Motor Speed @ 60 Hz:	3,450 RPM (2,850 RPM @ 50 Hz)	4,100 RPM (3,410 RPM @ 50 Hz)
Current Draw:	7 amps (@120 VAC / 60 Hz)	1.2 amps (@120 VAC / 60 Hz)
POWER SYSTEM:		
System Voltage:	120 VAC / 50-60 Hz (240 VAC / 50-60 Hz)	120 VAC / 50-60 Hz (240 VAC / 50-60 Hz)
Cord Length:	50 ft / 14 Gauge (9 m / 1.5 mm²)	30 ft / 18 Gauge (9 m / 1 mm)
GENERAL:		
Cleaning Width:	20" (50.8 cm)	10.5" <i>(27 cm)</i>
Sound Levels: *Decibel levels per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA	69 dBA	Under 57 dBA
Vibration at Base:	N/A	Avg. 6.5 mm/s ² , MAX @ 6.8 mm/s ² (Avg. 5.8 mm/s ² , MAX @ 6.0 mm/s ²)
Vibration at Handle:	N/A	2.13 mm/s² (Passed C € Requirements)
Dust Skirt:	Standard	Standard

CEU

Manufactured By: R.P.S. Corporation 1711 South Street Racine, Wisconsin 53404 (USA) Phone: (800) 450-9824 International: (+001) 262-681-6470 www.tomcatequip.com