



# Ultra Speed Pro® 1500 Burnisher

- 20 inch path, 1,500 rpm produces wet-look shine
- Easy-to-use, fingertip controls
- Safety lock-out switch
- Handle-mounted circuit breaker
- All-metal construction

The Ultra Speed Pro® 1500 features a powerful DC rectified motor that drives a consistent 1,500 rpm's to maintain a wet-look shine on finished floors. With easy-to-use fingertip controls and multiple safety features, such as handle-mounted safety switch and circuit breaker, and a 50 foot yellow cord, this machine gets the job done fast. The handle can be operated on the locked position or allowed to float. A flexible pad driver is included.




Safety lock-out switch.



Cast aluminum chassis.



Foot-activated handle lock.

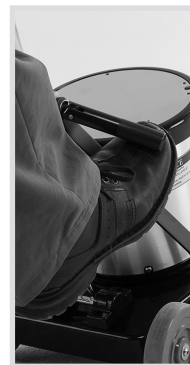

50 ft safety yellow cord.

**Trusted. Reliable. Efficient.**

**Clarke®**  
by Nilfisk

Specifications	Ultra Speed Pro® 1500
Model Number	CLARKE1500
Deck Size	20 in (50.8 cm)
Pad / Brush Speed	1,500 rpm
Voltage	110 V
Horsepower	1.5 hp (1.1 kW)
Motor	DC rectified
Sound Level	68 dB A
Power Cable, Safety Yellow	50 ft (15.2 m)
Wheels, Non-marking Grey	Two 5 in (12.7 cm)
Amp Draw	13.5 amps
Weight	88 lb (40 kg)
Shipping Weight	102 lb (46 kg)
Dimensions (L x W x H)	35 x 20 x 48 in (89 x 50.8 x 122 cm)

Specifications are subject to change without notice.



### Simple

- Easy-to-use, fingertip controls
- Large transport wheels
- Minimal training required
- Handle-mounted circuit breaker
- Safety lock-out switch

### Rugged

- 3 year parts warranty
- 2 year labor warranty
- DC rectified motor
- All-metal construction
- Engineered to withstand heavy, daily use in commercial applications

### Affordable

- Best value in the industry
- Flexible pad driver included
- High cleaning productivity rate

**Clarke**<sup>®</sup>  
by Nilfisk

9435 Winnetka Avenue North  
Brooklyn Park, MN 55445  
Phone: 800.253.0367  
Fax: 800.825.2753  
www.clarkeus.com

240 Superior Boulevard  
Mississauga, Ontario, Canada L5T 2L2  
Phone: 800.668.8400  
Fax: 800.263.5111  
www.nilfisk-advance.ca